


greenworks **pro**[™]

2935607AU/ 2935707AU/
2935807AU/ 2936807AU/
2935907AU

EN

BATTERY

OPERATOR MANUAL

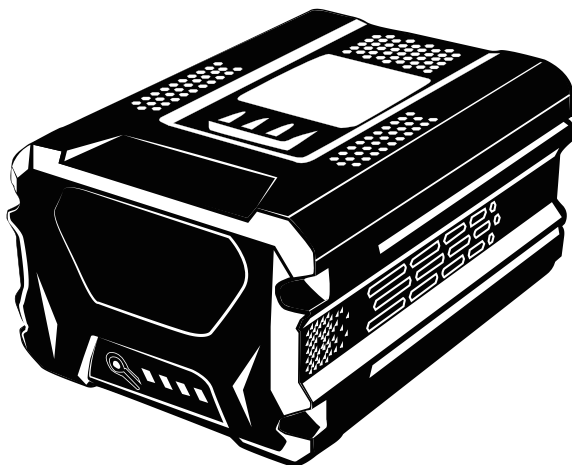

E8038

G60B2/G60B25
G60B4/G60B5/G60B6

Greenworks Australia
A Division Jak Max P/L
380 Foley's Road Derrimut
Victoria, Australia 3026

www.greenworksaustralia.com

1	Important Safety Instructions.....	2	4	Operation.....	2
2	Safety notes and precautions.....	2	4.1	Check battery capacity.....	2
3	Environmentally safe battery disposal.....	2	5	Technical data.....	3
			6	Warranty.....	3

1 IMPORTANT SAFETY INSTRUCTIONS

For the proper use, maintenance and storage of this battery, it is crucially important that you read and understand the instructions given in this manual.

To avoid serious injury, risk of fire, explosion and danger of electric shock or electrocution:

- If the battery pack case is cracked or damaged, DO NOT insert into the charger. Replace with a new battery pack.
- Charge the battery pack only with the recommended charger.
- DO NOT try to short circuit any terminals of battery pack.

▲ WARNING

If the battery fluid gets in your eyes, flush immediately with clean water for at least 15 minutes. Get immediate medical attention. Do not charge the battery pack in rain or in wet conditions. Do not immerse the tool, battery pack, or charger in water or other liquid.

- Do not allow the battery pack or charger to overheat. If they are warm, allow them to cool down. Recharge only at room temperature.
- Do not place the battery pack in the sun or in a warm environment. Keep at normal room temperature.
- Keep in shady, cool and dry condition, if the battery is not charged for a long time; charge the battery for 2 hours every 2 months.
- The battery pack cells may develop a small leak under extreme usage or temperature conditions. If the outer seal is broken and the leakage gets on your skin:
 - Use soap and water to wash immediately.
 - Neutralize with lemon juice, vinegar, or other mild acid.
- If leakage gets in your eyes, follow instructions above and seek medical attention.
- Please check prior use, if output voltage and current of the battery charger is suitable for the charging battery pack.
- During transporting, the battery pack needs protective packaging.
- Handle with care.
- Keep away from humidity and fire.

2 SAFETY NOTES AND PRECAUTIONS

- Do not disassemble the battery.
- Keep away from the children.
- Do not expose the battery to water or salt water, battery should be stored in a cool and dry location and should place the battery in cool and dry environment.

- Do not place the battery in high-temperature locations, such as near a fire, heater, etc.
- Do not reverse the positive terminal and the negative terminal of the battery.
- Do not connect the positive terminal and the negative terminal of the battery to each other with any metal objects.
- Do not knock, strike or step on the battery.
- Do not solder directly onto the battery and pierce the battery with nails or other edge tools.
- In the event that the battery leaks and the fluid gets into one's eye, do not rub the eye. Rinse well with water.
- Immediately discontinue use of the battery, if, while using the battery emits an unusual smell, feels hot, changes color, changes shape, or appears abnormal in any other way.

3 ENVIRONMENTALLY SAFE BATTERY DISPOSAL



▲ WARNING


If the battery pack cracks or breaks, with or without leaks, do not recharge it and do not use. Dispose of the battery and replace with a new battery pack. DO NOT ATTEMPT TO REPAIR IT! To avoid injury and risk of fire, explosion, or electric shock, and to avoid damage to the environment:

- Cover the battery's terminals with heavy-duty adhesive tape.
- DO NOT attempt to remove or destroy any of the battery pack components.
- DO NOT attempt to open the battery pack.
- If a leak develops, the released electrolytes are corrosive and toxic. DO NOT get the solution in the eyes or on skin, and do not swallow it.
- DO NOT place these batteries in your regular household trash.
- DO NOT incinerate.
- DO NOT place them where they will become part of any waste landfill or municipal solid waste stream.
- Take them to a certified recycling or disposal centre.

4 OPERATION

4.1 CHECK BATTERY CAPACITY

Press the battery capacity indicator (BCI) button. The lights will illuminate according to the batteries capacity level. See chart below:



Lights	Capacity
4 Green Lights	The battery is above 80% capacity
3 Green Lights	The battery is between 80% and 60% capacity.
2 Green Lights	The battery is between 60% and 40% capacity.
1 Green Light	The battery is between 40% and 20% capacity.
1 Blinking Green Light	The battery is between 20% and 10% capacity.
Lights go out	The battery is less than 10% capacity and requires charging immediately.

- * 1. LED CAPACITY INDICATOR
2. BATTERY CAPACITY INDICATOR (BCI) BUTTON

BATTERY PROTECTION FEATURES

This lithium-ion battery packs are designed with features that protect the lithium-ion cells and maximize battery life.

If the tool stops during use, release the trigger to reset and resume operation. If the tool still does not work, the battery needs to be recharged.

COLD WEATHER OPERATION

The lithium-ion battery pack can be used in temperatures down to -14°C (6.8°F). Put the battery pack on a tool and use the tool in a light duty application. After about a minute, the pack will warm up and begin operating normally.

5 TECHNICAL DATA

Model	G60B2
Battery	54 V $\overline{\text{---}}$, 2Ah, 108Wh, 60V Max
Charge time	20min. (use CAC814 Charger)
	60min. (use CAC805 Charger)

Model	G60B25
Battery	54 V $\overline{\text{---}}$, 2.5Ah, 135Wh, 60V Max
Charge time	25min. (use CAC814 Charger)
	75min. (use CAC805 Charger)

Model	G60B4
-------	-------

Battery	54 V $\overline{\text{---}}$, 4Ah, 216Wh, 60V Max
Charge time	40min. (use CAC814 Charger)
	120min. (use CAC805 Charger)

Model	G60B5
Battery	54 V $\overline{\text{---}}$, 5Ah, 270Wh, 60V Max
Charge time	50min. (use CAC814 Charger)
	150min. (use CAC805 Charger)

Model	G60B6
Battery	54 V $\overline{\text{---}}$, 6Ah, 324Wh, 60V Max
Charge time	60min. (use CAC814 Charger)
	180min. (use CAC805 Charger)

6 WARRANTY

(The full warranty terms and conditions can be found on Greenworks webpage)

The Greenworks warranty is 4 years on the product, and 2 years on batteries (consumer/private usage) from the date of purchase. This warranty covers manufacturing faults. A faulty product under warranty might be either repaired or replaced. A unit that has been misused or used in other ways than described in the owner's manual might be rejected for warranty. Normal wear, and wear parts are not considered as warranty. The original manufacturer warranty is not affected by any additional warranty offered by a dealer or retailer.

A faulty product must be returned to the point of purchase in order to claim for warranty, together with the proof of purchase (receipt).